
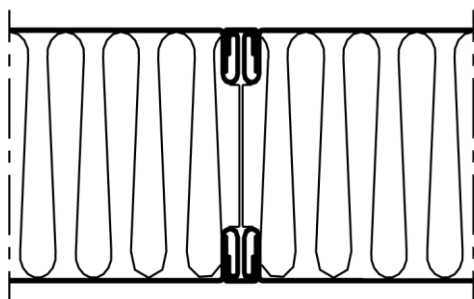


Isolamin panel

33CL80

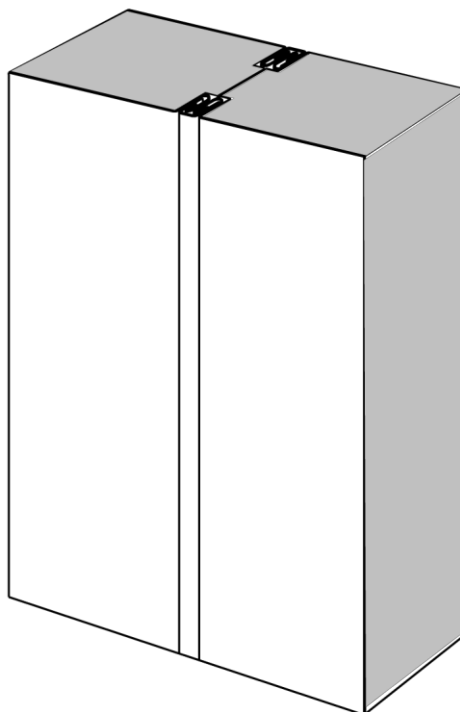

PANEL	33CL80
Thickness	80 mm
Weight	~26,1 kg/m ²
Modulus width	565, 1180 mm
Reaction to fire	A2:s1:d0
Fire class	EI 60
Sound reduction	33dB Rw
U-value	0,58 W/m ² K

TOLERANCES	CORE MATERIAL	SURFACE MATERIAL
Length: ± 5 mm	Material: Mineral wool	Material: Hot dipped galvanised steel sheet
Width: ± 1 mm	Density: 180 kg/m ³ ±10%	Thickness: Galv, PVC, Painted 0,7 mm
Thickness: +0/-1 mm		
Rectangularity: 1 mm/m		
Curved surface: + 0/-0.35 mm		

The technical information in this edition was accurate at the time of the printing. We reserve the right to make changes due to the progressive development of our products. The latest information can be obtained upon request.